

New

WiSens CTDSV

Conductivity, temperature, depth and salinity measurements

Sound velocity measurements

Autonomous data logger



Data loggers

New WiSens range:

- Autonomous
- Wi-Fi connection
- Compatible iOS, Mac OS, Windows, Android
- No specific software

WiSens

WiSens CTD measures and records **conductivity, temperature and depth**. **Salinity** and **sound velocity** are deducted by calculation. It has been designed to be used down to 300m.

Compact and easy to use:

- Fast wireless configuration and data collection thanks to the Wi-Fi communication
- Easy maintenance


Rugged and reliable:

- Optimal protection of the sensor
- Lithium batteries for long-term use (up to several years)
- Copper-based anti-fouling replaceable sensor protection

nke
INSTRUMENTATION

www.nke-instrumentation.com







WiSens CTDSV Autonomous data logger

Conductivity, temperature, depth and salinity data logger
Sound Velocity

DESIGNATION		WiSens CTDSV 300
Order code		60-07-613
Depth (D)	Depth Accuracy	300m 0.15%
Temperature (T)	Range Accuracy	-2°C to +35°C 0.005°C
Conductivity (C)	Range Accuracy	0-70 mS/cm 0.04 mS/cm
Salinity	Range Accuracy	2-42 PSU 0.05 PSU
Sound Velocity <i>Calculation based on Unesco Technical Papers in Marine Science 44, 53 pp.</i>	Range Accuracy	1300-1700m/s 0.001m/s
Time	Internal clock with calendar	< 1mn/month
Start and stop mode	Manual or programmable	Conductivity, temperature or pressure level trigger, Date condition
Sampling rate		Programmable from 1 second to 99 hours
Autonomy	Memory Energy	16 Mb (= 2 million measures) Replaceable Lithium battery
Data	Format Compression	CSV ZIP
Dimensions Weight in air		315 mm x Ø 40 mm 435 gr
Communication	Wi-Fi	Magnetic activation Accessory: remote control

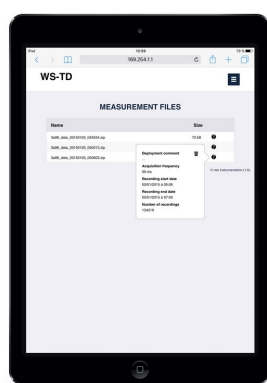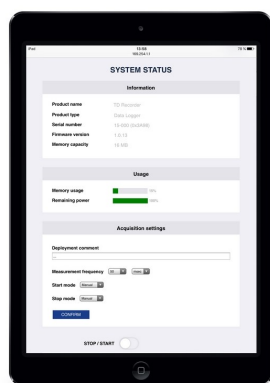

nke
INSTRUMENTATION



Sales Department
Tel : +33 (0)2 97 36 41 31 - Fax : +33 (0)2 97 36 55 17
info.instrumentation@nke.fr
www.nke-instrumentation.com

